

# SG50KTL-M-20

String Inverter



## High Yield

- Max. efficiency 98.9%
- Max. DC/AC ratio up to 1.3
- Long-term overload at 1.1Pn
- Up to 4 MPP Trackers



## Easy O&M

- String current monitoring function for fast trouble shooting



## Saved Investment


- Less construction and installation costs in 2MW block
- Integrated DC combiner box with DC switch, DC fuses and DC/AC Type II SPD




## Grid Support

- Grid support including LVRT, HVRT and FRT
- Comply with CE, G59/3 and VDE 4105

## Circuit Diagram

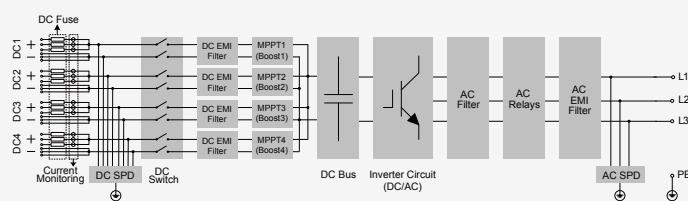

## Efficiency Curve

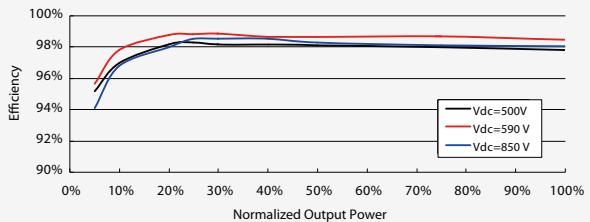

<b>Input (DC)</b>		<b>SG50KTL-M-20</b>
Max. PV input voltage	1000 V	
Min. PV input voltage / Startup input voltage	300 V / 300 V	
Nominal input voltage	590 V	
MPP voltage range	300 - 950 V	
MPP voltage range for nominal power	500 - 850 V	
No. of independent MPP inputs	4	
Max. number of PV strings per MPPT	3	
Max. PV input current	112 A (28 A / 28 A / 28 A / 28 A)	
Max. current for input connector	12 A	
Max. DC short-circuit current	140 A (35 A / 35 A / 35 A / 35 A)	
<b>Output (AC)</b>		
Nominal AC power (at 50 °C)	50000 W	
Max. AC output power at PF=1 (at 45 °C)	55000 W	
Max. AC apparent power (at 45 °C)	55000 VA	
Max. AC output current	80A	
Nominal AC voltage	3 / N / PE or 3 / PE , 230 / 400 V	
AC voltage range	310 - 480 V	
Nominal grid frequency / Grid frequency range	50 Hz / 45 - 55 Hz, 60 Hz / 55 - 65 Hz	
THD	< 3% (at nominal power)	
DC current injection	< 0.5%In	
Power factor at nominal power / Adjustable power factor	> 0.99 @default value at nominal power, (adj. 0.8 leading - 0.8 lagging)	
Feed-in phases / Connection phases	3 / 3	
<b>Efficiency</b>		
Max. efficiency / Euro. efficiency	98.9 % / 98.5 %	
<b>Protection</b>		
DC reverse connection protection	Yes	
AC short-circuit protection	Yes	
Leakage current protection	Yes	
Grid monitoring	Yes	
DC switch / AC switch	Yes / No	
DC fuse	Yes (positive, 15 A)	
PV string current monitoring	Yes	
Anti-PID function	Optional	
Oversupply protection	DC Type II / AC Type II	
<b>General Data</b>		
Dimensions (W*H*D)	665*906*256 mm	
Weight	70 kg	
Isolation method	Transformerless	
Degree of protection	IP65	
Night power consumption	<1W	
Operating ambient temperature range	-25 to 60 °C (>50 °C derating)	
Allowable relative humidity range (non-condensing)	0 - 100%	
Cooling method	Smart forced air cooling	
Max. operating altitude	4000 m (> 3000 m derating)	
Display / Communication	Graphic LCD / RS485	
DC connection type	MC4	
AC connection type	Screw clamp terminal (Max. 50 mm <sup>2</sup> )	
Compliance	CEA, IEC 62109, IEC 61727, IEC 62116, IEC 61683, IEC 60068, CE, VDE AR-N-4105 and G59/3	
Grid support	LVRT, HVRT, active & reactive power control and power ramp rate control	
Type designation	SG50KTL-M-20	

